EMC TEST REPORT

Certificate No.	:	TBC-C-202504-0140-2
Report No.	:	TBR-C-202504-0140-2
Applicant	:	Xinyu Xiangyun Technology Co., Ltd
Equipment Under Test (EUT)		
EUT Name	:	Portable espresso machine
Model No.	:	XYD-003
Series Model No.	:	----
Brand Name	:	----
Receipt Date	:	2025-04-16
Test Date	:	2025-04-16 to 2025-04-21
Issue Date	:	2025-04-21
Standards	:	EN IEC 55014-1:2021 EN IEC 55014-2:2021
Conclusions	:	**PASS** In the configuration tested, the EUT complied with the standards specified above, The EUT technically complies with the 2014/30/EU Directive requirements.
Test By	:	Hao He
Reviewed By	:	Joy Yang
Approved By	:	Ivan Su

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

1 A/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District,Shenzhen, Guangdong, China
Tel: +86 75526509301 Fax: +86 75526509195

TABLE OF CONTENTS

1. GENERAL INFORMATION 4
1.1. Client Information 4
1.2. General Description of EUT (Equipment Under Test) 4
1.3. Description of Operating Mode 5
1.4. Block Diagram Showing the Configuration of System Tested 6
1.5. Description of Support Units 6
1.6. Performance Criterion 7
1.7. Classification of Apparatus 7
1.8. Measurement Uncertainty 8
1.9. Test Facility 8
2. TEST RESULTS SUMMARY 9
3. TEST SOFTWARE 10
4. TEST EQUIPMENT USED 10
5. DISTURBANCE POWER MEASUREMENT 12
5.1. Test Standard and Limit 12
5.2. Test Setup 13
5.3. Test Procedure 13
5.4. Deviation From Test Standard 13
5.5. Test Data 13
6. RADIATED DISTURBANCE TEST 14
6.1. Test Standard and Limit 14
6.2. Test Setup 14
6.3. Test Procedure 14
6.4. Deviation From Test Standard 15
6.5. Test Data 15
7. ELECTROSTATIC DISCHARGE IMMUNITY TEST 16
7.1. Test Requirements 16
7.2. Test Setup 16
7.3. Test Procedure 16
7.4. Deviation From Test Standard 17
7.5. Test Data 17
8. RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST 18
8.1. Test Requirements 18
8.2. Test Setup 18
8.3. Test Procedure 18
8.4. Deviation From Test Standard 19
8.5. Test Data 19
9. PHOTOGRAPHS - CONSTRUCTIONAL DETAILS 20
10. PHOTOGRAPHS - TEST SETUP 26
ATTACHMENT A--RADIATED EMISSION TEST DATA (BELOW 1G) 28
ATTACHMENT B--ELECTROSTATIC DISCHARGE TEST DATA 32
ATTACHMENT C--RF FIELD STRENGTH SUSCEPTIBILITY TEST DATA 34

Revision History

Report No.	Version	Description	Issued Date
TBR-C-202504-0140-2	Rev.01	Initial issue of report	2025-04-21

1. General Information

1.1. Client Information

Applicant	:	Xinyu Xiangyun Technology Co., Ltd
Address	:	Room 319, Building 1, No. 176, Shatu Street, Kongmujiang Sub-district Office, Yushui District, Xinyu City, Jiangxi Province, China
Manufacturer	:	Xinyu Xiangyun Technology Co., Ltd
Address	:	Room 319, Building 1, No. 176, Shatu Street, Kongmujiang Sub-district Office, Yushui District, Xinyu City, Jiangxi Province, China

1.2. General Description of EUT (Equipment Under Test)

EUT Name	:	Portable espresso machine
Model(s)	:	XYD-003
Model Difference	:	----
Brand Name	:	----
Power Supply	:	DC 5V, 2A from USB cable DC 11.1V, 2600mAh from Battery

1.3. Description of Operating Mode


To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging Mode
Mode 2	Working Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as Following:

For EMI Test	
Final Test Mode	**Description**
Mode 1	Charging Mode
Mode 2	Working Mode
For EMS Test	
Final Test Mode	**Description**
Mode 1	Charging Mode
Mode 2	Working Mode

1.4. Block Diagram Showing the Configuration of System Tested

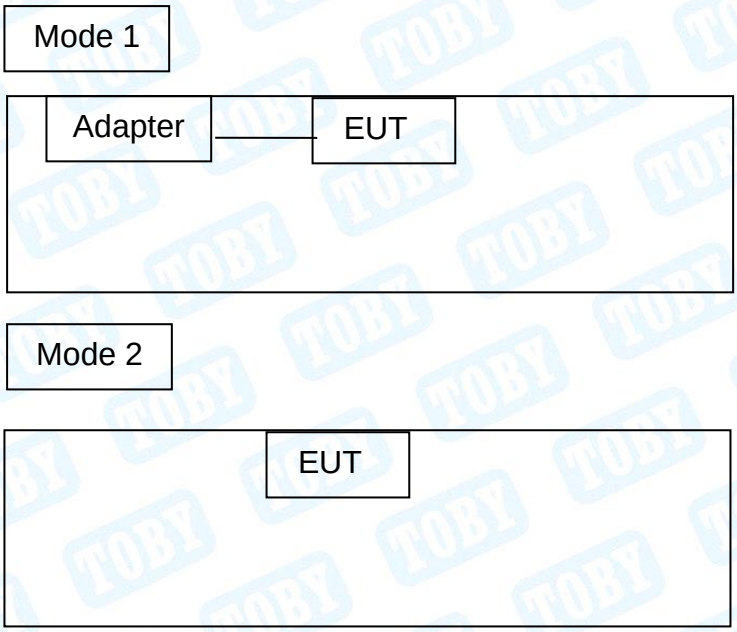

1.5. Description of Support Units

Equipment Information				
Name	**Model**	**S/N**	**Manufacturer**	**Used "√"**
Adapter	HW-050200C01	----	HUAWEI	√
Note: The Adapter provided by the lab.				

1.6. Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance of loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

1.7. Classification of Apparatus

Category I: Apparatus containing no electronic control circuitry.

Category II: Transformer toys, dual supply toys, mains powered motor operated appliances, tools, heating appliances and similar electric apparatus(for example-UV radiators, IR radiators and microwave ovens) containing electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15MHz.

Category III: Battery powered apparatus (with built-in batteries or external batteries), which in normal use is not connected to the mains, containing an electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15MHz.

This category includes apparatus provided with rechargeable batteries which can be charged by connecting the apparatus to the mains power. However, this apparatus shall also be tested as an apparatus in category III while it is connected to the mains network.

Category IV: All other apparatus covered by the scope of this standard.

1.8. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

Test	Parameters	Expanded Uncertainty (U_{Lab})	Expanded Uncertainty (U_{Cispr})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	±3.50 dB ±3.10 dB	±4.0 dB ±3.6 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	±4.60 dB	N/A
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	±4.50 dB	±5.2 dB
Radiated Emission	Level Accuracy: Above 1000MHz	±4.20 dB	N/A
Mains Harmonic	Voltage	±3.11%	N/A
Voltage Fluctuations & Flicker	Voltage	±3.25%	N/A

1.9. Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)
The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01
The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351.Designation Number: CN1223.

IC Registration No.: (11950A)
The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

2. Test Results Summary

EMISSION		
Description of test items	**Standards**	**Results**
Conducted disturbance at mains terminals	EN IEC 55014-1:2021	N/A
Disturbance Power	EN IEC 55014-1:2021	N/A
Click measurement	EN IEC 55014-1:2021	N/A
Radiated disturbance	EN IEC 55014-1:2021	Pass
Harmonic current emissions	EN IEC 61000-3-2:2019+A1:2021	N/A
Voltage fluctuation and flicker	EN 61000-3-3:2013+A2:2021	N/A

Immunity (EN IEC 55014-2:2021)			
☐ **Category I**	☒ **Category II**	☒ **Category III**	☐ **Category IV**

Description of test items	**Basic Standards**	**Results**
Electrostatic Discharge (ESD)	EN 61000-4-2: 2009	Pass
Radio-frequency, Continuous Radiated Disturbance	EN IEC 61000-4-3:2020	Pass
EFT/B Immunity	EN 61000-4-4: 2012	N/A
Surge Immunity	EN 61000-4-5:2014+A1:2017	N/A
Conducted RF Immunity	EN IEC 61000-4-6:2023	N/A
Voltage dips, 40% reduction	EN IEC 61000-4-11:2020	N/A
Voltage dips, 70% reduction		
Voltage interruptions		

Note:(1) N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Immunity	TS+(J32-RE)	Tonsced	3.0.0.5

4. Test Equipment Used

Test Site				
No.	**Test Site**	**Manufacturer**	**Specification**	**Used**
TB-EMCSR001	Shielding Chamber #1	YIHENG	7.5*4.0*3.0（m）	X
TB-EMCSR002	Shielding Chamber #2	YIHENG	8.0*4.0*3.0（m）	X
TB-EMCCA001	3m Anechoic Chamber #A	ETS	9.0*6.0*6.0（m）	√
TB-EMCCB002	3m Anechoic Chamber #B	YIHENG	9.0*6.0*6.0（m）	√

Radiation Emission Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 17, 2024	Jun. 16, 2025
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jun. 17, 2024	Jun. 16, 2025
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Feb. 27, 2024	Feb.26, 2026
Horn Antenna	ETS-LINDGREN	3117	00143207	Feb. 27, 2024	Feb.26, 2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 27, 2024	Feb.26, 2026
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 14, 2024	Jun. 13, 2026
Pre-amplifier	SONOMA	310N	185903	Feb. 20, 2025	Feb.19, 2026
Pre-amplifier	HP	8449B	3008A00849	Feb. 20, 2025	Feb.19, 2026
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Aug. 29, 2024	Aug. 28, 2025
Discharge Immunity Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
ESD Tester	TESEQ	NSG437	304	Jun. 19, 2024	Jun. 18, 2025

Radiated Immunity Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
Gestockte Log.-Per.-Breitband-antenna Stacked Log.-Per.-Broadband	SCHWARZBECK	STLP 9129	162	N/A	N/A
Electric field probe	Narda	EP 601	811ZX01000	Feb. 21, 2025	Feb.20, 2026
Signal Generator	Agilent	N5181A	MY50141953	Aug. 29, 2024	Aug. 28, 2025
EPM Series Power Meter	KEYSIGHT	N1914A	MY61180020	Jun. 17, 2024	Jun. 16, 2025
Power Sensor	KEYSIGHT	E9301A	MY61130007	Jun. 17, 2024	Jun. 16, 2025
Power Sensor	KEYSIGHT	E9301A	MY61130011	Jun. 17, 2024	Jun. 16, 2025
Radio Frequency Switch	Tonscend	JS0806s	21E8060428	N/A	N/A
Microwave Power amplifier	Micotop	MPA-80-1000-250	MPA2105144	Jun. 17, 2024	Jun. 16, 2025
Microwave Power amplifier	Micotop	MPA-1000-6000-100	MPA2105150	Jun. 17, 2024	Jun. 16, 2025

5. Disturbance Power Measurement

5.1. Test Standard and Limit

5.1.1. Test Standard

EN IEC 55014-1:2021.

5.1.2. Test Limit

Disturbance Power Limits

	Household and similar appliances		Tools					
1	2	3	4	5	6	7	8	9
Frequency range			Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
(MHz)	dB(pW) Quasi-pesk	dB(pW) Avergge[a]	dB(pW) Quasi-pesk	dB(pW) Avergge[a]	dB(pW) Quasi-pesk	dB(pW) Avergge[a]	dB(pW) Quasi-pesk	dB(pW) Avergge[a]
30 to 300	Increasing linearly with the frequency from:							
	45 to 55	35 to 45	45 to 55	35 to 45	49 to 59	39 to 49	55 to 65	45 to 55


[a] If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.
At the transition frequency the lower limit applies.

Margin when performing disturbance power measurement

	Household and similar appliances		Tools					
1	2	3	4	5	6	7	8	9
Frequency Range			Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
(MHz)	dB(pW) Quasi-peak	dB(pW) Average	dB(pW) Quasi-peak	dB(pW) Average	dB(pW) Quasi-peak	dB(pW) Average	dB(pW) Quasi-peak	dB(pW) Average
200 to 300	Increasing linearly with the frequency from							
	0 to 10 dB	-	0 to 10 dB	-	0 to 10 dB	-	0 to 10 dB	-

NOTE 1 This table only applies if specified 4.1.2.3.2.
NOTE 2 The measured result at a particular frequency shall be less than the relevant limit minus the corresponding margin (at that frequency)

5.2. Test Setup

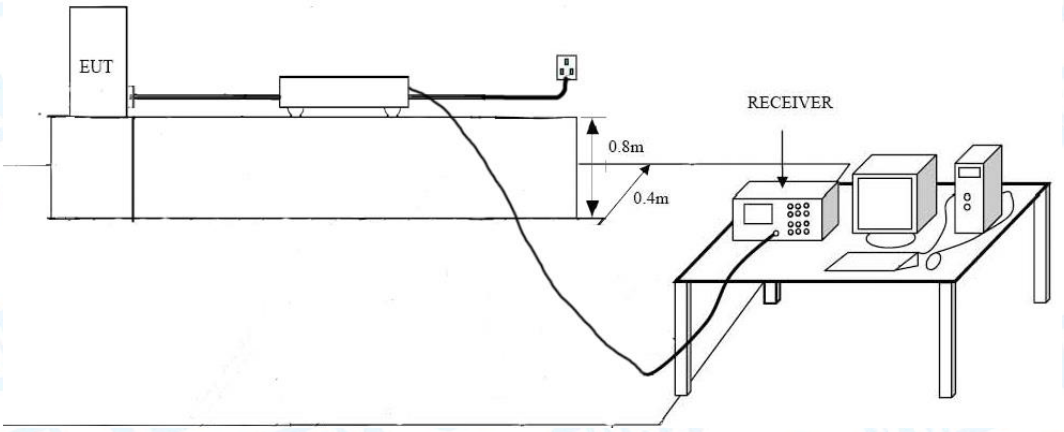

5.3. Test Procedure

The EUT is placed on the plane 0.8m high above the ground by insulating support and away from other metallic surface at least 0.4m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.

The bandwidth of the field strength meter is set at 120kHz.

5.4. Deviation From Test Standard

No deviation

5.5. Test Data

This test is not applicable.

6. Radiated Disturbance Test

6.1. Test Standard and Limit

6.1.1. Test Standard


EN IEC 55014-1:2021.

6.1.2. Test Limit

Radiated Disturbance Test Limit

Frequency	Limit (dBμV/m)
	Quasi-peak Level
30MHz~230MHz	40
230MHz~300MHz	47
300MHz~1000MHz	47
Remark: 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.	

6.2. Test Setup

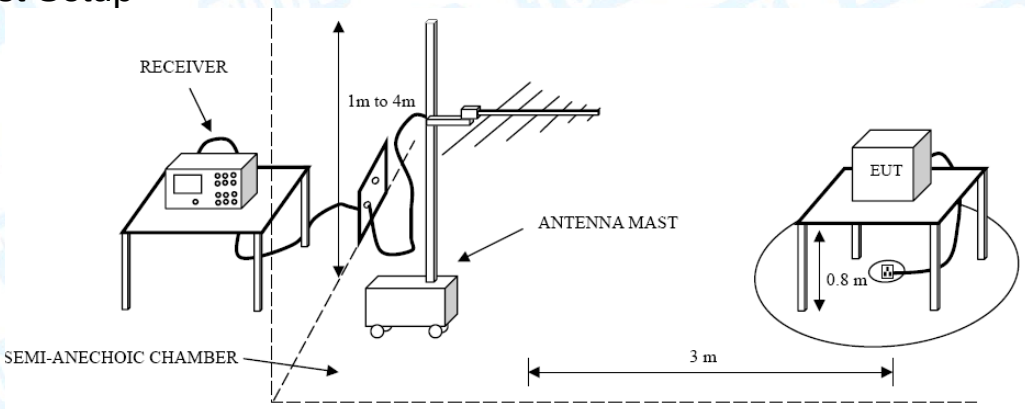

6.3. Test Procedure

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

The initial step in collecting radiated emission data is a spectrum Quasi Peak detector mode scanning the measurement frequency range.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

6.4. Deviation From Test Standard

No deviation

6.5. Test Data

Please refer to the Attachment A.

7. Electrostatic Discharge Immunity Test

7.1. Test Requirements

7.1.1. Test Standard


EN IEC 55014-2:2021 (EN 61000-4-2:2009)

7.1.2. Test Level

Characteristics	Test Levels
Air Discharge	±8 kV
Contact Discharge	±4 kV
Remark: Apply 20 discharges (10 with positive and 10 with negative polarity) to each selected discharging point.	

7.1.3. Performance criterion: B

7.2. Test Setup

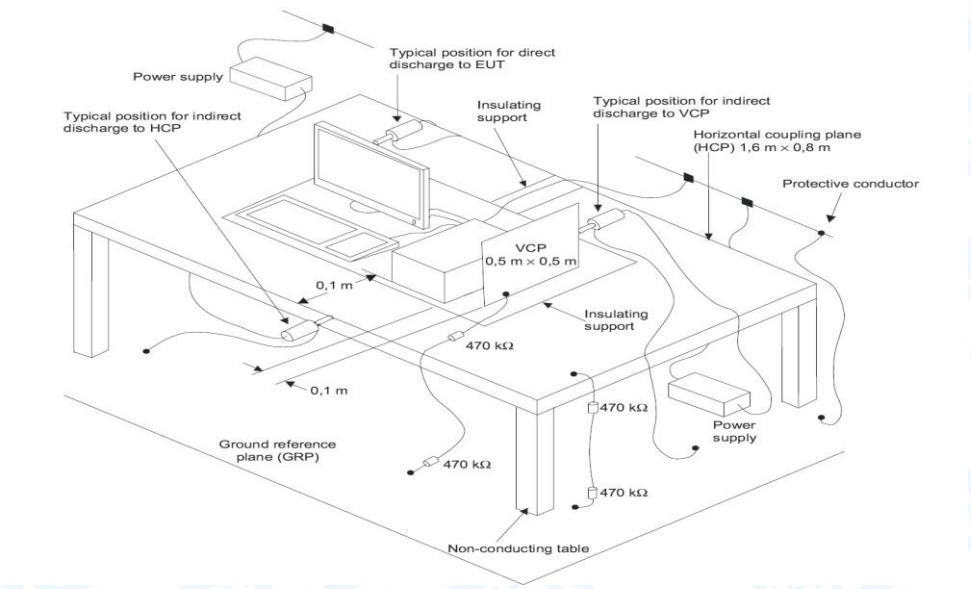

7.3. Test Procedure

7.3.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

7.3.2. Contact Discharge:

All the procedure shall be same as air discharge. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

7.3.3. Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

7.3.4. Indirect discharge for vertical coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

7.4. Deviation From Test Standard

No deviation

7.5. Test Data

Please refer to the Attachment B.

8. Radiated Electromagnetic Field Immunity test

8.1. Test Requirements

8.1.1. Test Standard


EN IEC 55014-2:2021 (EN IEC 61000-4-3:2020)

8.1.2. Test Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

8.1.3. Performance criterion: A

8.2. Test Setup

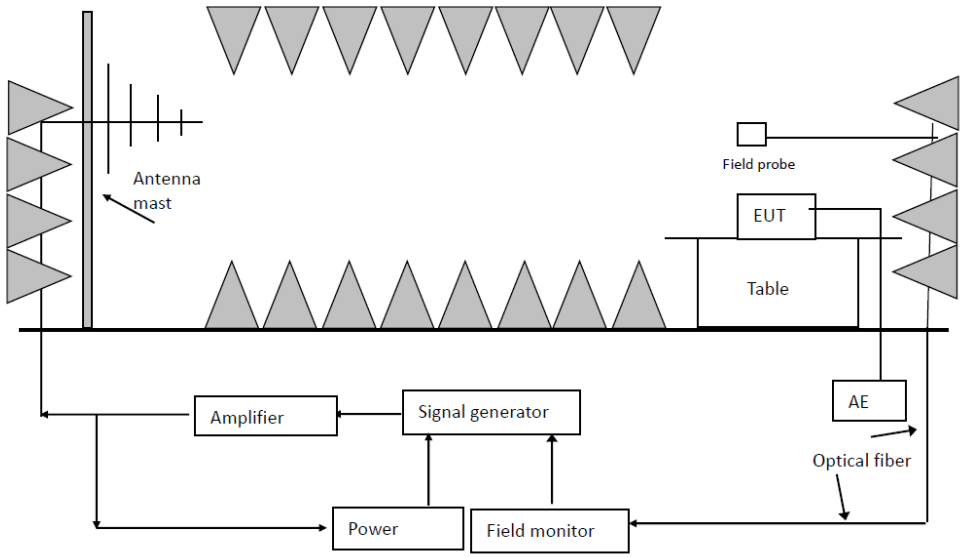

8.3. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a camera is used to monitor its screen.

All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	1KHz, 80% AM Modulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	1 Sec.

8.4. Deviation From Test Standard

No deviation

8.5. Test Data

Please refer to the Attachment C.

9. Photographs - Constructional Details

Photo 1 Appearance of EUT

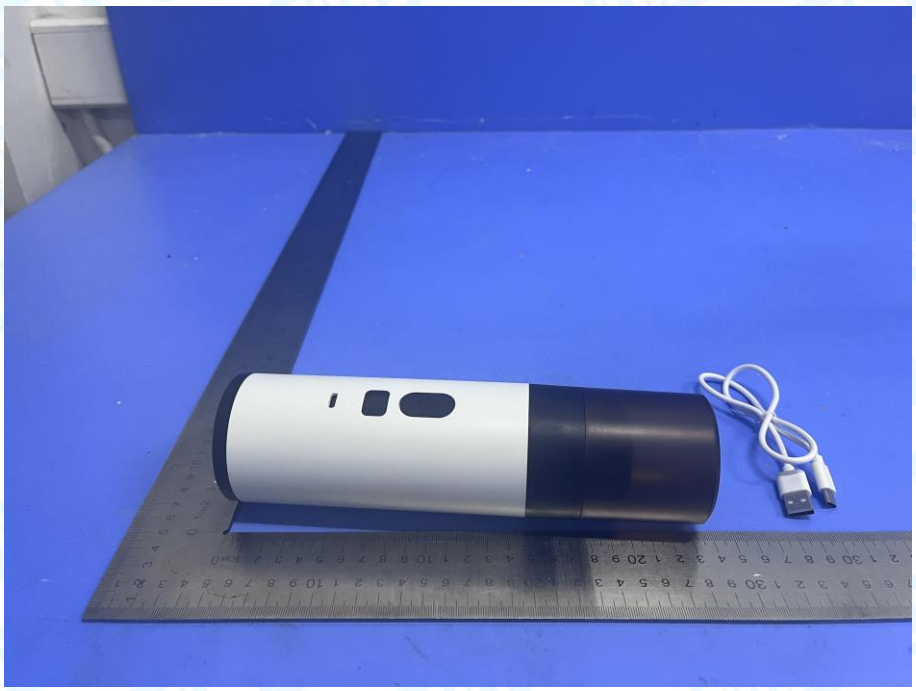


Photo 2 Appearance of EUT

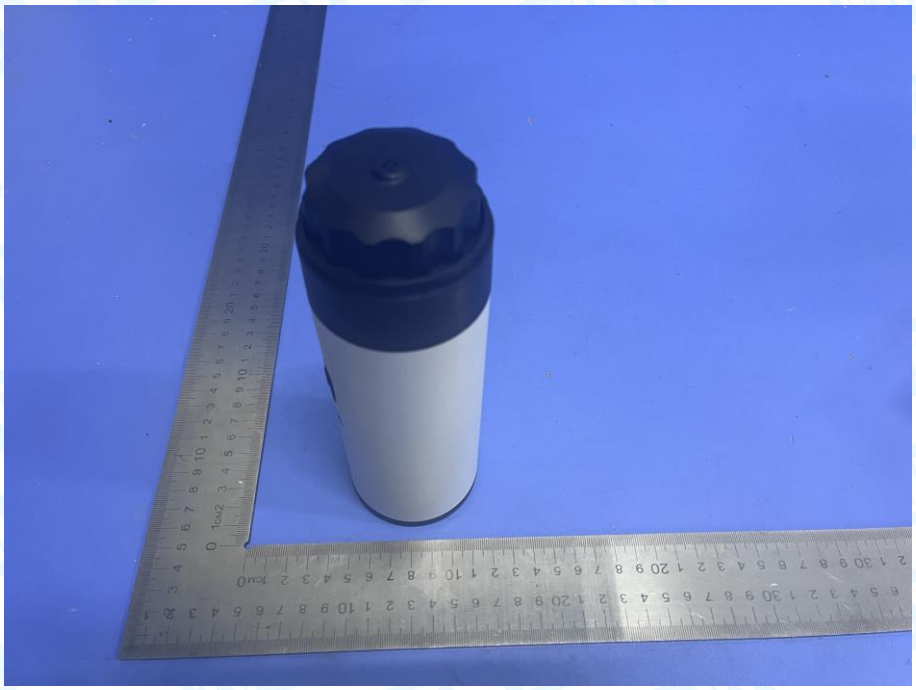


Photo 3 Appearance of EUT

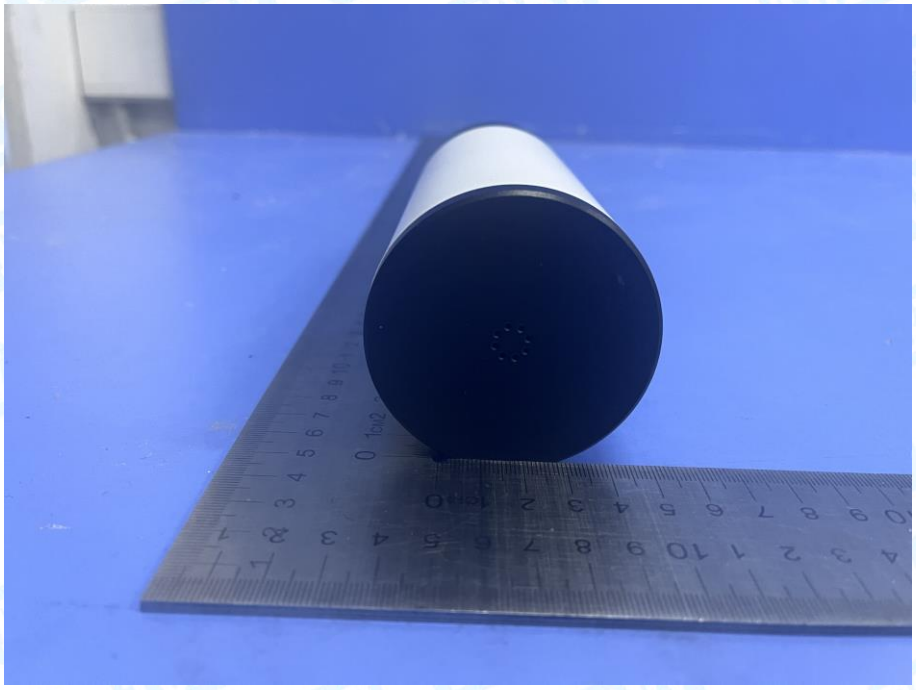


Photo 4 Appearance of EUT

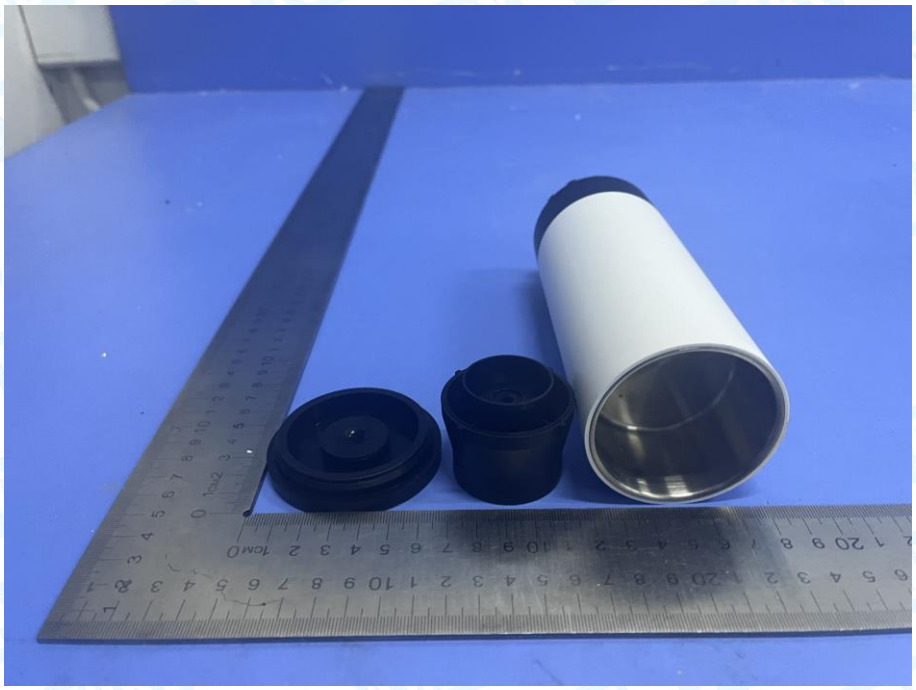


Photo 5 Internal of EUT

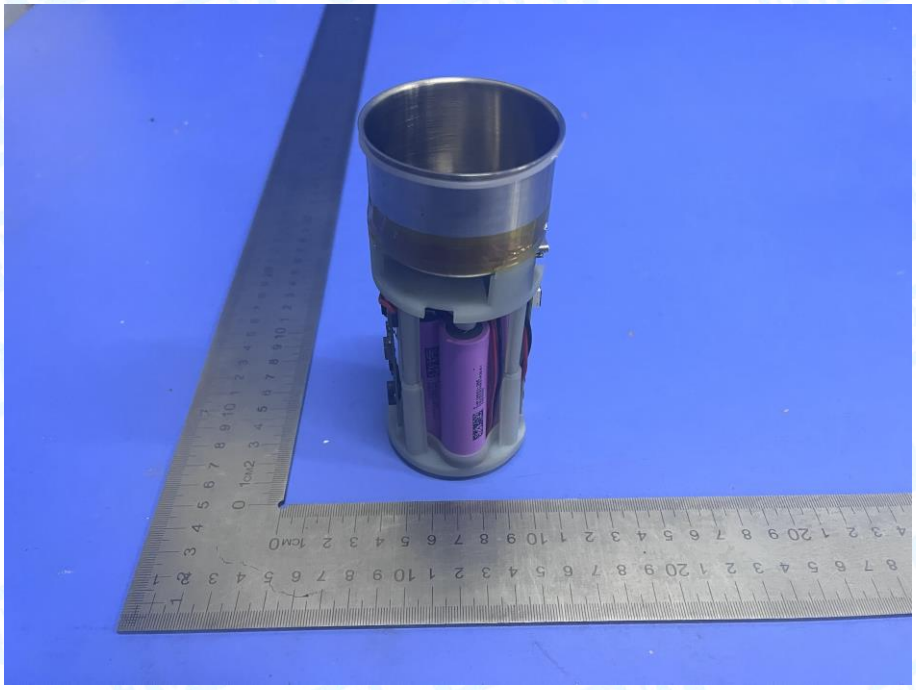


Photo 6 Internal of EUT

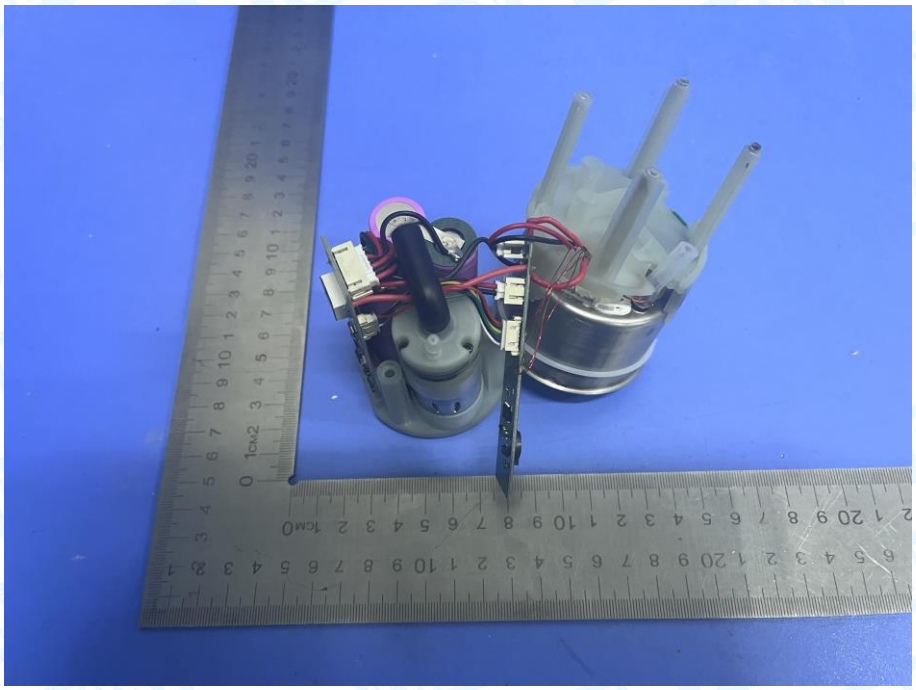


Photo 7 Appearance of PCB

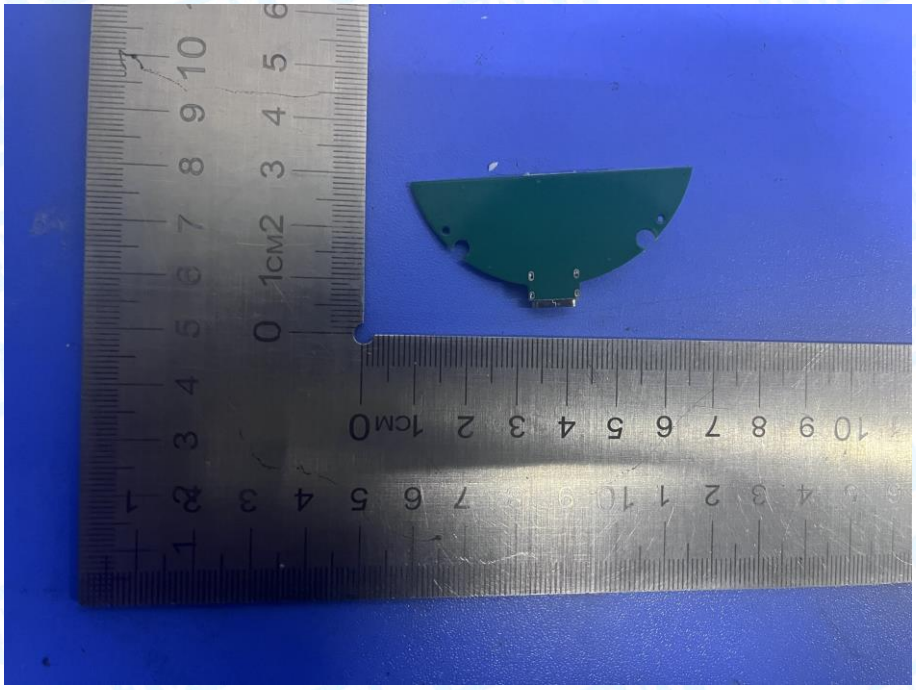


Photo 8 Appearance of PCB

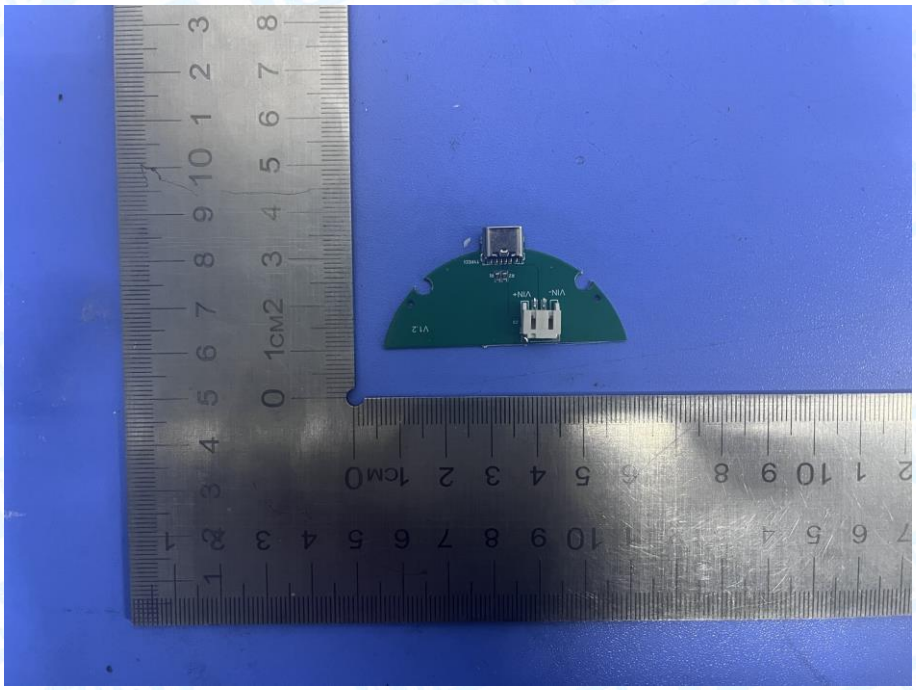


Photo 9 Appearance of PCB

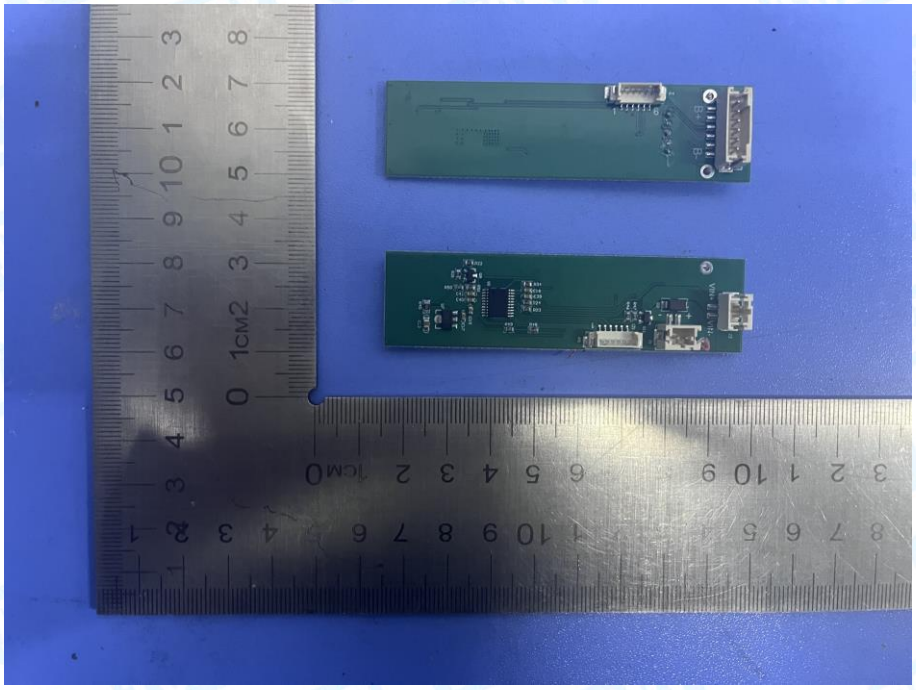


Photo 10 Appearance of PCB


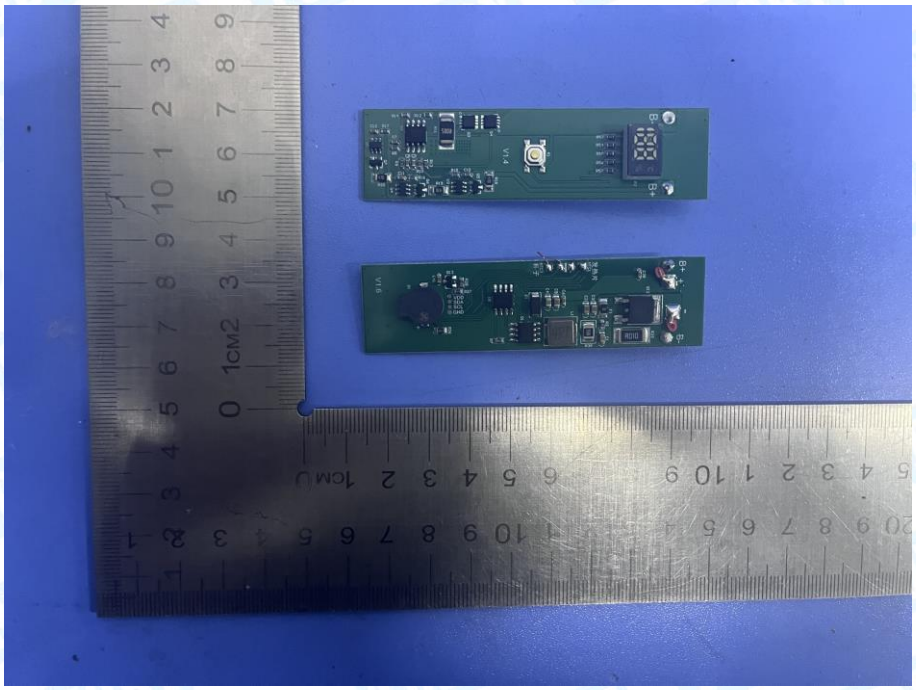


Photo 11 Appearance of Battery




10. Photographs - Test Setup


Radiated Emission Test Setup

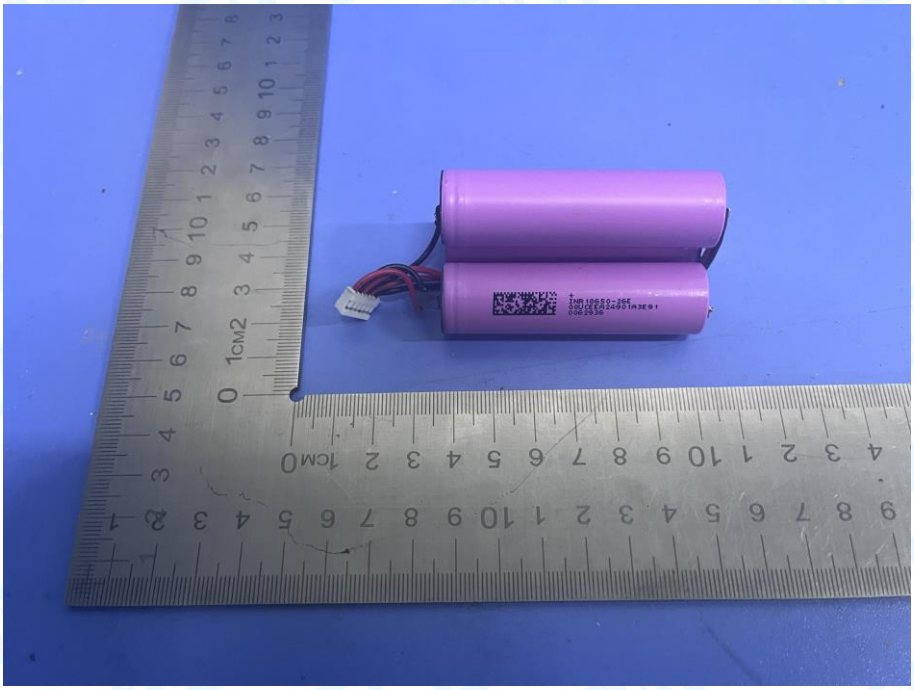

Radiated Emission Test Setup

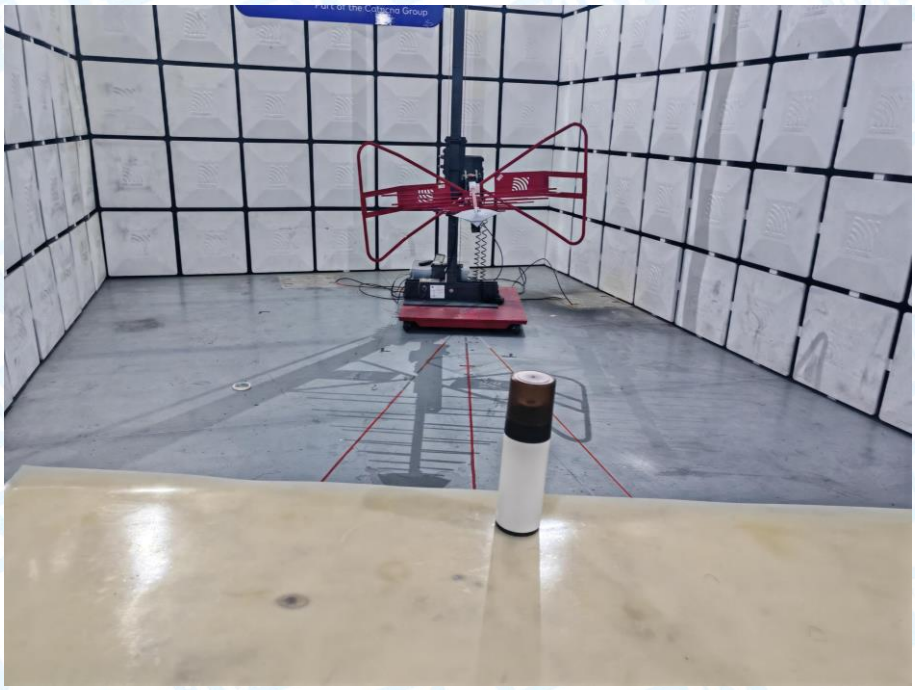

Electrostatic Discharge Test Setup

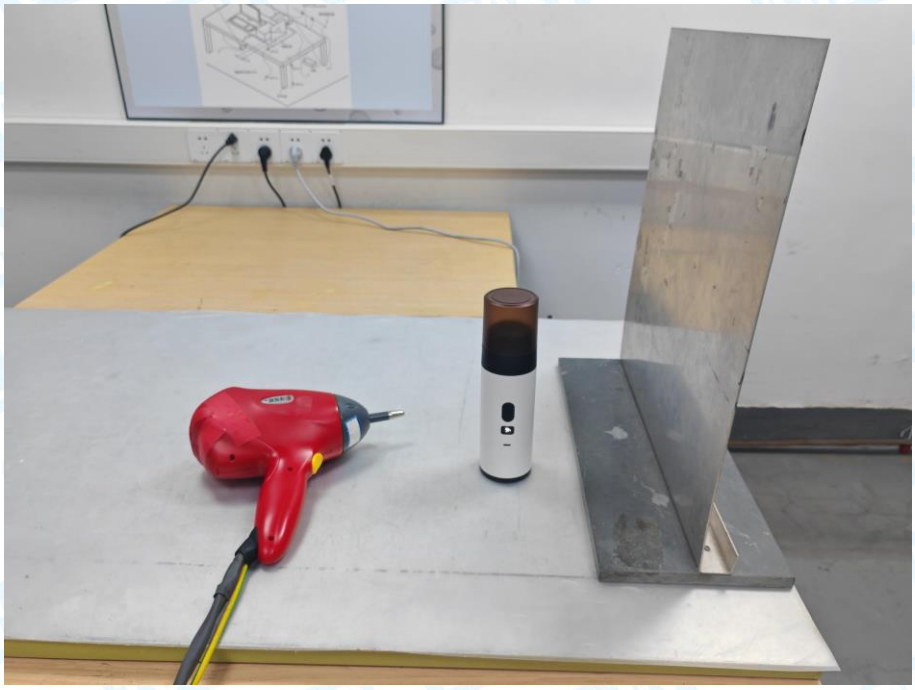

RF Field Strength Susceptibility Test Setup



Attachment A--Radiated Emission Test Data (Below 1G)


Temperature:	23.5℃	**Relative Humidity:**	46%
Pressure:	1020 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	Mode 1		
Remark:	N/A		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		34.0365	34.76	-11.73	23.03	40.00	-16.97	peak
2		57.1914	33.63	-16.30	17.33	40.00	-22.67	peak
3	!	113.7143	49.69	-15.47	34.22	40.00	-5.78	peak
4	*	196.5098	48.72	-13.12	35.60	40.00	-4.40	peak
5		293.0842	50.47	-11.22	39.25	47.00	-7.75	peak
6		709.1823	36.03	0.56	36.59	47.00	-10.41	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)


Temperature:	23.5℃	**Relative Humidity:**	46%
Pressure:	1020 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	Mode 1		
Remark:	N/A		

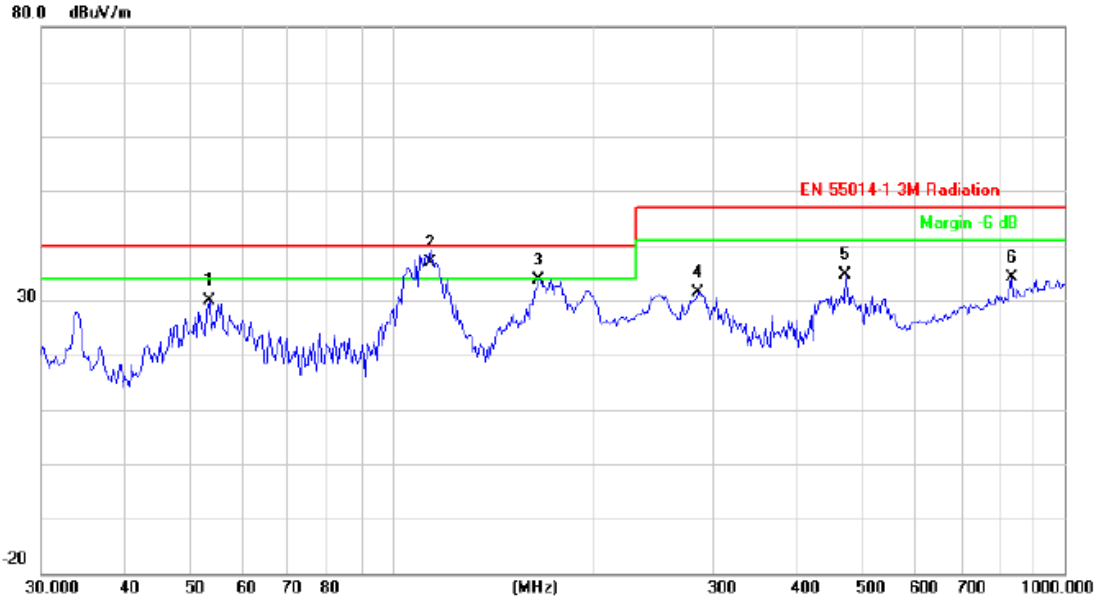

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		53.3179	46.04	-16.18	29.86	40.00	-10.14	peak
2	*	113.7143	52.27	-15.47	36.80	40.00	-3.20	QP
3		164.9075	47.60	-13.95	33.65	40.00	-6.35	peak
4		284.9767	42.73	-11.32	31.41	47.00	-15.59	peak
5		472.1760	39.62	-5.01	34.61	47.00	-12.39	peak
6		833.3171	31.62	2.59	34.21	47.00	-12.79	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)


Temperature:	23.5℃	Relative Humidity:	46%
Pressure:	1020 hPa		
Test Voltage:	DC 11.1V		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2		
Remark:	N/A		

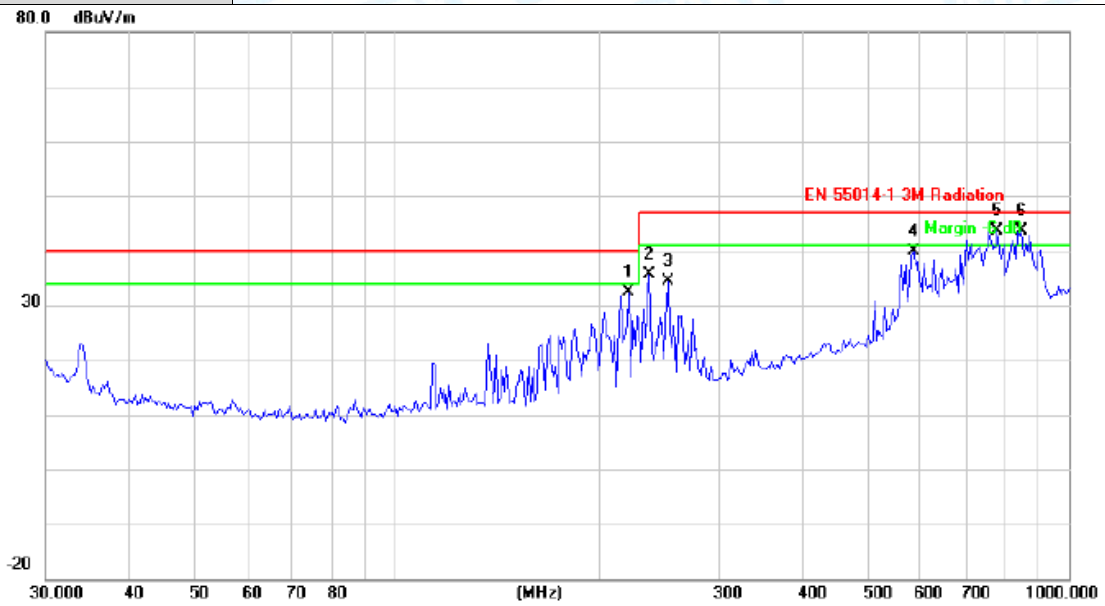

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		221.3919	45.10	-12.79	32.31	40.00	-7.69	peak
2		237.4758	48.29	-12.63	35.66	47.00	-11.34	peak
3		252.9482	46.86	-12.56	34.30	47.00	-12.70	peak
4		586.8437	42.44	-2.63	39.81	47.00	-7.19	peak
5	!	782.3451	42.30	1.23	43.53	47.00	-3.47	peak
6	*	851.0353	40.70	3.00	43.70	47.00	-3.30	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.5℃	**Relative Humidity:**	46%
Pressure:	1020 hPa		
Test Voltage:	DC 11.1V		
Ant. Pol.	Vertical		
Test Mode:	Mode 2		
Remark:	N/A		

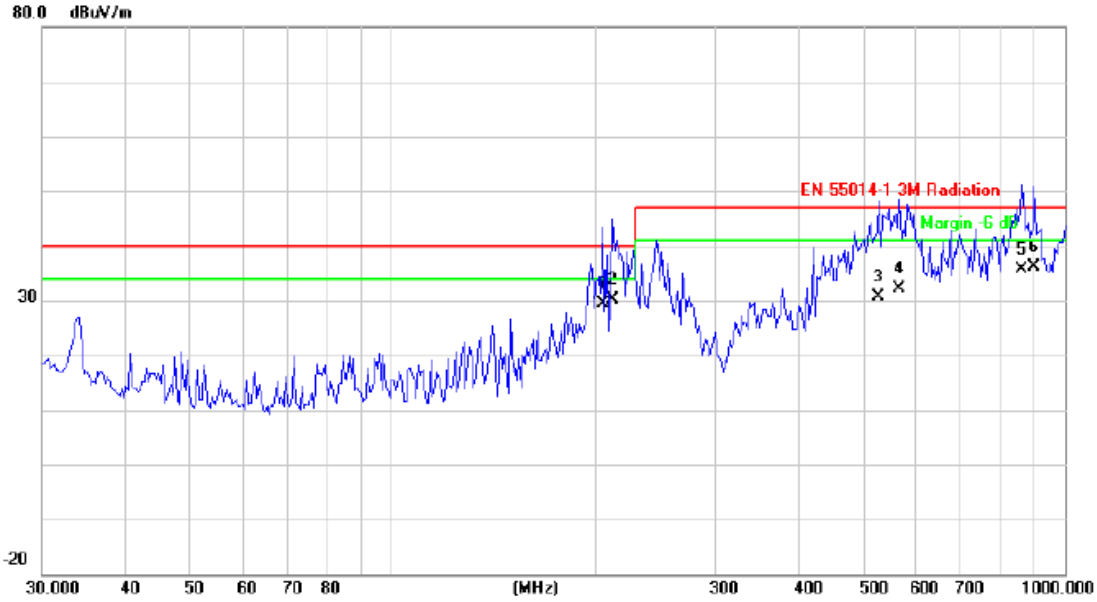

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		204.9551	42.11	-12.81	29.30	40.00	-10.70	QP
2	*	212.2695	42.96	-12.76	30.20	40.00	-9.80	QP
3		528.2458	34.21	-3.63	30.58	47.00	-16.42	QP
4		566.6223	35.12	-2.98	32.14	47.00	-14.86	QP
5		863.0562	32.34	3.26	35.60	47.00	-11.40	QP
6		900.1474	32.15	4.06	36.21	47.00	-10.79	QP

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Attachment B--Electrostatic Discharge Test Data


Temperature:	22.5℃								Humidity:		48%							
Pressure(hpa):	1020																	
Power supply:	DC 5V/11.1V								Test Mode:		Mode 1/2							
Location	**Test Level(kV) and Result**																**Criteria**	**Result**
	Air Discharge								**Contact Discharge**									
	2		4		8		15		2		4		6		8			
	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
A1	A	A	A	A	A	A	/	/	/	/	/	/	/	/	/	/	B	PASS
A2	A	A	A	A	A	A	/	/	/	/	/	/	/	/	/	/	B	PASS
A3	A	A	A	A	A	A	/	/	/	/	/	/	/	/	/	/	B	PASS

Test Level(kV) and Result																		
Location	**HCP**								**VCP**								**Criteria**	**Result**
	2		4		6		8		2		4		6		8			
	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
Front	/	/	A	A	/	/	/	/	/	/	A	A	/	/	/	/	B	PASS
Back	/	/	A	A	/	/	/	/	/	/	A	A	/	/	/	/	B	PASS
Left	/	/	A	A	/	/	/	/	/	/	A	A	/	/	/	/	B	PASS
Right	/	/	A	A	/	/	/	/	/	/	A	A	/	/	/	/	B	PASS

Note: "/" Representative the test not applicable

Criteria A: There was no change operated with initial operating during the test.
Criteria B: The EUT function loss during the test, but self-recoverable after the test.
Criteria C: The system shut down during the test.

Test Location Photos

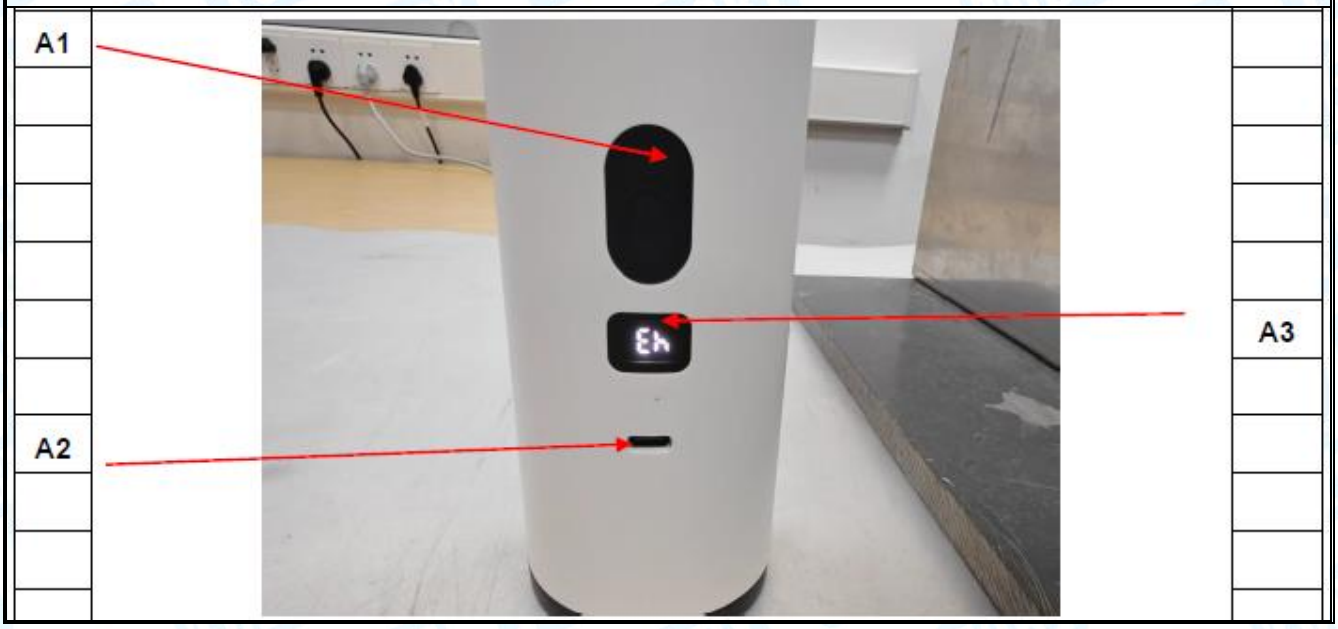

Attachment C--RF Field Strength Susceptibility Test Data

Temperature	: 23.1℃	Humidity	: 50%
Power supply	: DC 5V	Test Mode	: Mode 1
Pressure(hpa)	: 1020		

Required Performance Criteria: A

Unmodulation, 3V/m(r.m.s)

EUT Position	Actual Performance Criteria				Result
	Frequency Range 1: 80~1000MHz		Frequency Range 2: /		
	Horizontal	Vertical	Horizontal	Vertical	
Front	A	A	/	/	PASS
Right	A	A	/	/	PASS
Rear	A	A	/	/	PASS
Left	A	A	/	/	PASS

Remark:

1) Criteria A: The apparatus shall continue to operate as intended during the test.
2) Criteria B: The apparatus shall continue to operate as intended after the test.
3) Criteria C: The system shut down during the test, Provide the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

-----END OF REPORT-----