FCC Part 15B Test Report

Report No.	:	TBR-C-202504-0140-3
Applicant	:	Xinyu Xiangyun Technology Co., Ltd
Equipment Under Test (EUT)		
EUT Name	:	Portable espresso machine
Model No.	:	XYD-003
Series Model No.	:	----
Brand Name	:	----
Receipt Date	:	2025-04-16
Test Date	:	2025-04-16 to 2025-04-21
Issue Date	:	2025-04-21
Standards	:	FCC 47 CFR Part 15 Subpart B
Conclusions	:	**PASS** In the configuration tested, the EUT complied with the standards specified above The EUT technically complies with the FCC requirements.
Test By	:	Hao He
Reviewed By	:	y Yang
Approved By	:	Ivan Su

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

1A/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China
Tel: +86 75526509301 Fax: +86 75526509195

Contents

CONTENTS 2
1. GENERAL INFORMATION 4
1.1 Client Information 4
1.2 General Description of EUT (Equipment Under Test) 4
1.3 Block Diagram Showing The Configuration of System Tested 5
1.4 Description of Support Units 5
1.5 Description of Test Mode 6
1.6 Test standards 6
1.7 Test Facility 7
1.8 Measurement Uncertainty 8
2. TEST SUMMARY 8
3. TEST SOFTWARE 8
4. TEST EQUIPMENT USED AND TEST SITE 9
5. LABEL REQUIREMENTS & STATEMENT REQUIREMENTS 10
6. CONDUCTED EMISSION TEST 11
6.1 Test Standard and Limit 11
6.2 Test Setup 11
6.3 Test Procedure 12
6.4 Deviation From Test Standard 12
6.5 EUT Operating Mode 12
6.6 Test Data 12
7. RADIATED EMISSION TEST 13
7.1 Test Standard and Limit 13
7.2 Test Setup 14
7.3 Test Procedure 14
7.4 Deviation From Test Standard 15
7.5 EUT Operating Mode 15
7.6 Test Data 15
8. PHOTOGRAPHS - CONSTRUCTIONAL DETAILS 16
9. PHOTOGRAPHS - TEST SETUP 22
ATTACHMENT A--RADIATED EMISSION TEST DATA 23

Revision History

Report No.	Version	Description	Issued Date
TBR-C-202504-0140-3	Rev.01	Initial issue of report	2025-04-21

1. General Information


1.1 Client Information

Applicant	:	Xinyu Xiangyun Technology Co., Ltd
Address	:	Room 319, Building 1, No. 176, Shatu Street, Kongmujiang Sub-district Office, Yushui District, Xinyu City, Jiangxi Province, China
Manufacturer	:	Xinyu Xiangyun Technology Co., Ltd
Address	:	Room 319, Building 1, No. 176, Shatu Street, Kongmujiang Sub-district Office, Yushui District, Xinyu City, Jiangxi Province, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Portable espresso machine
Model(s)	:	XYD-003
Model Difference	:	----
Brand Name	:	----
Power Supply	:	DC 5V, 2A from USB cable DC 11.1V, 2600mAh from Battery
Equipment	:	☐ Class A ☒ Class B
Class A Equipment: the Equipment is not intended primarily for use in a residential environment. **Class B Equipment:** the Equipment is intended primarily for use in a residential environment.		

1.3 Block Diagram Showing The Configuration of System Tested

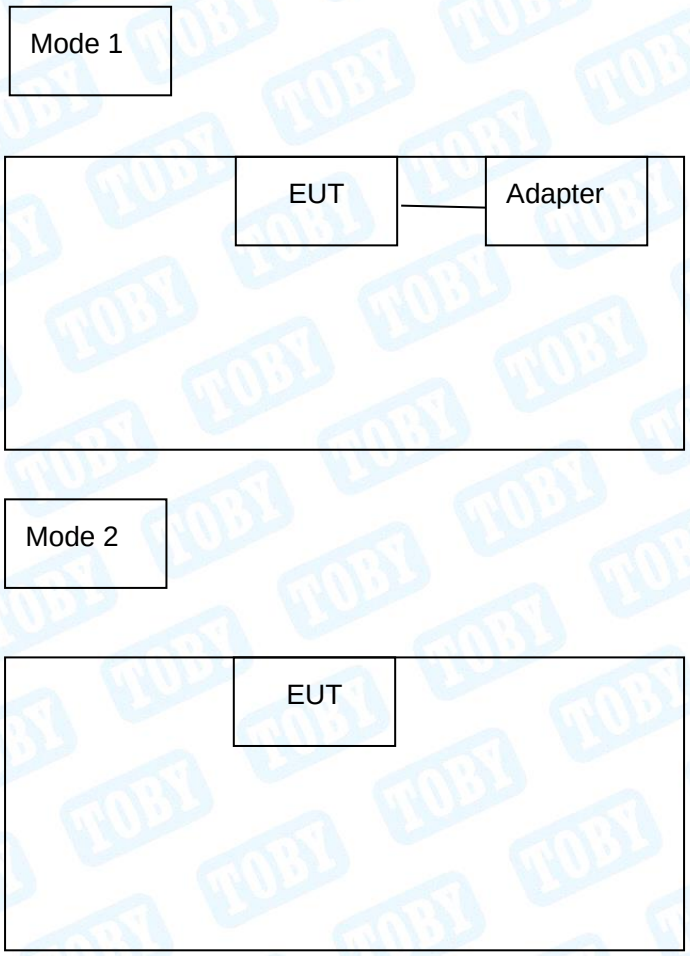

1.4 Description of Support Units

Equipment Information				
Name	**Model**	**S/N**	**Manufacturer**	**Used "√"**
Adapter	HW-050200C01	----	HUAWEI	√
Cable Information				
Number	**Shielded Type**	**Ferrite Core**	**Length**	**Note**
----	----	----	----	----
Note: The Adapter provided by the lab.				

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	**Description**
/	/

For Radiated Test	
Final Test Mode	**Description**
Mode 1	Charging Mode
Mode 2	Working Mode

1.6 Test standards

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.107, 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.7 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

1.8 Measurement Uncertainty

The reported uncertainty of measurement y ± U，where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2，providing a level of confidence of approximately 95 %.

Test	Parameters	Expanded Uncertainty (U_{Lab})	Expanded Uncertainty (U_{Cispr})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	±3.50 dB ±3.10 dB	±4.0 dB ±3.6 dB
Radiated Emission	Level Accuracy: Above 1000MHz	±4.50 dB	N/A
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	±4.40 dB	±5.2 dB

2. Test Summary

Test Items	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15 Section 15.107	ANSI C63.4-2014	N/A
Radiated Emission	FCC 47 CFR Part 15 Section 15.109	ANSI C63.4-2014	Pass
Note: N/A is an abbreviation for Not Applicable.			

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE

4. Test Equipment Used and Test Site

Test Site				
No.	**Test Site**	**Manufacturer**	**Specification**	**Used**
TB-EMCSR001	Shielding Chamber #1	YIHENG	7.5*4.0*3.0（m）	X
TB-EMCSR002	Shielding Chamber #2	YIHENG	8.0*4.0*3.0（m）	X
TB-EMCCA001	3m Anechoic Chamber #A	ETS	9.0*6.0*6.0（m）	√
TB-EMCCB002	3m Anechoic Chamber #B	YIHENG	9.0*6.0*6.0（m）	X

Conducted Emission Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal.Due Date**
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 17, 2024	Jun. 16, 2025
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 17, 2024	Jun. 16, 2025
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 17, 2024	Jun. 16, 2025
LISN	Rohde & Schwarz	ENV216	101131	Jun. 17, 2024	Jun. 16, 2025
Radiation Emission Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal.Due Date**
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 17, 2024	Jun. 16, 2025
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jun. 17, 2024	Jun. 16, 2025
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Feb. 27, 2024	Feb.26, 2026
Horn Antenna	ETS-LINDGREN	3117	00143207	Feb. 27, 2024	Feb.26, 2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 27, 2024	Feb.26, 2026
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 14, 2024	Jun. 13, 2026
Pre-amplifier	SONOMA	310N	185903	Feb. 20, 2025	Feb.19, 2026
Pre-amplifier	HP	8449B	3008A00849	Feb. 20, 2025	Feb.19, 2026
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Aug. 29, 2024	Aug. 28, 2025

5. Label Requirements & Statement Requirements

☒ **Class B**

Label Requirements

Class B digital device subject to certification by the FCC shall carry a warning label which includes the following statement:

*** * * W A R N I N G * * ***

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

☐ **Class A**

Statement Requirements

The operator's manual for a Class A digital device shall contain the following statements or their equivalent:

*** * * W A R N I N G * * ***

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment This equipment generates, uses, and can radiate radio frequency energy and, if not installed and uses in accordance with the instruction manual, may cause harmful interference to radio communications Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

*** * * * * * * * ***

If the EUT was tested with special shielded cables the operator's manual for such product shall also contain the following statements or their equivalent:
Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.

6. Conducted Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.107

6.1.2 Test Limit


Conducted Emission Test Limit (Class A)

Frequency (MHz)	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
0.15~0.50	79	66
0.50~30	73	60

Conducted Emission Test Limit (Class B)

Frequency (MHz)	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
0.15~0.5	66 ~ 56 *	56 ~ 46 *
0.50~5	56	46
5~30	60	50
*decreasing linearly with logarithm of the frequency		

6.2 Test Setup

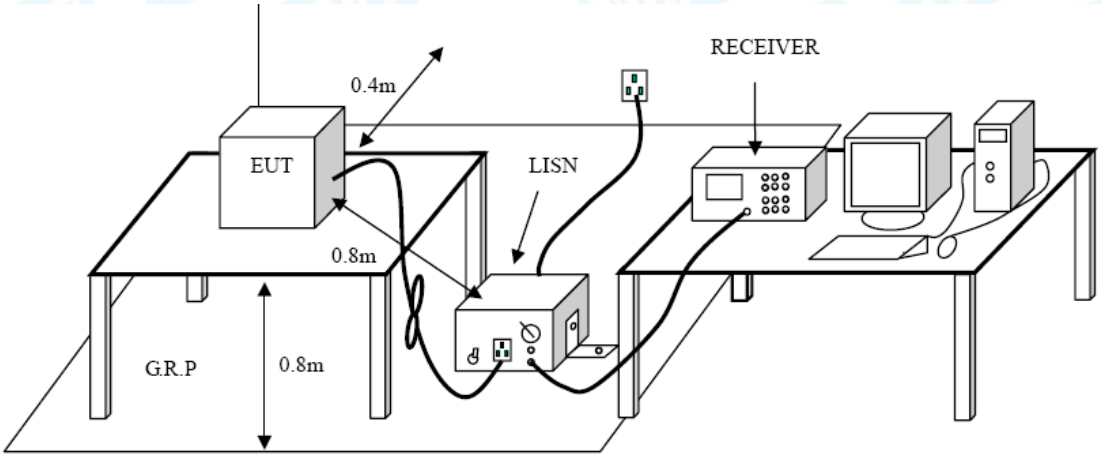

6.3 Test Procedure

●The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

●Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

●I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

●LISN at least 80 cm from nearest part of EUT chassis.

●The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

This test is not applicable.

7. Radiated Emission Test

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.109


7.1.2 Test Limit

Radiated Emission Test Limit (Class A)	
Frequency MHz	**Field Strengths Limits dB(μV/m)**
30 ~ 88	49.0
88 ~ 216	53.5
216 ~ 960	56.4
Above 960	59.5
Radiated Emission Test Limit (Class B)	
Frequency MHz	**Field Strengths Limits dB(μV/m)**
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
Above 960	54.0
* The lower limit shall apply at the transition frequency.	
* The test distance is 3m.	


Frequency (MHz)	**Class A Radiated Limit (dBμV/m)- Distance of 3 metres**	
	Linear Average Detector	Peak Detector
＞1000	59.5	79.5
Frequency (MHz)	**Class B Radiated Limit (dBμV/m)-Distance of 3 metres**	
	Linear Average Detector	Peak Detector
＞1000	54	74
Note：		

Highest Frequency Generated or Used in Device	Upper Frequency of Radiated Measurement
Below 1.705 MHz	No radiated testing required
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

7.2 Test Setup

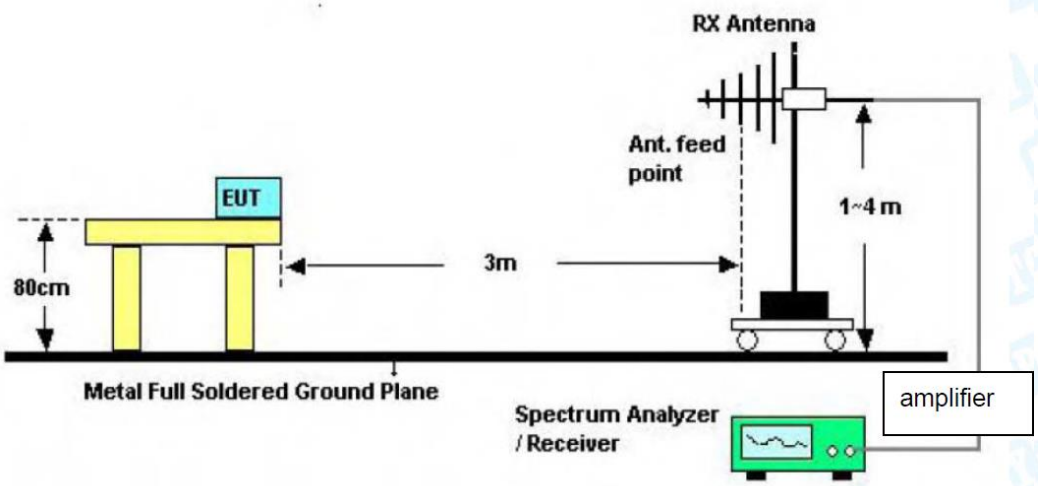

Below 1000MHz Test Setup

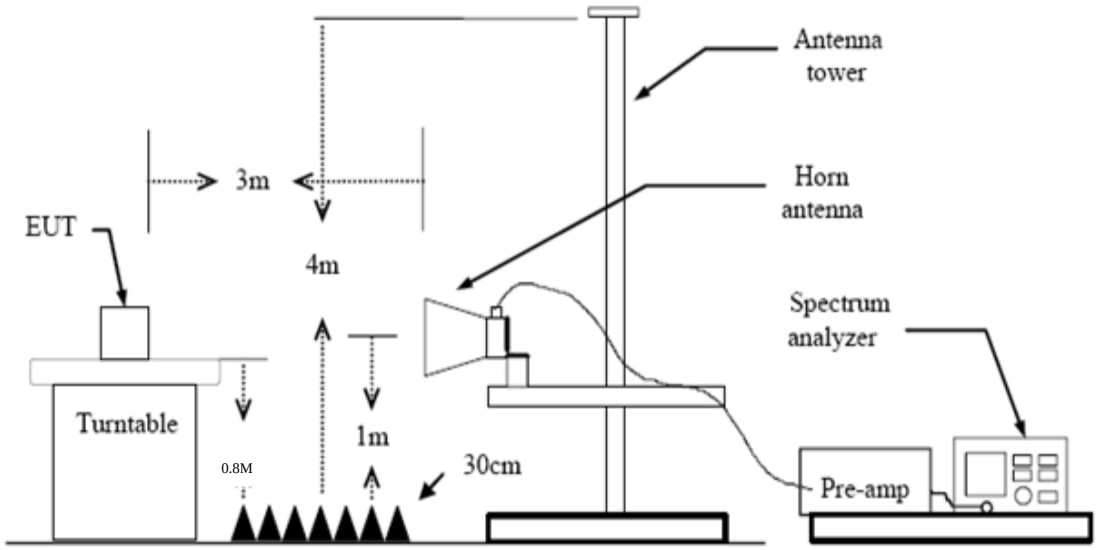

Above 1GHz Test Setup

7.3 Test Procedure

The EUT was placed on the top of a rotating table which is 0.8 meters above the ground. EUT is set 3.0 meters away from the receiving antenna that mounted on a antenna tower. The table was rotated 360 degrees to determine the position of the highest radiation, the antenna can be moved up and down between 1.0 meter and 4 meters to find out the

maximum emission level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30MHz to 1000MHz. If the Peak Mode measured value compliance with and lower than quasi-peak mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. Measurements shall be made with a Peak and AVG measuring receiver in the frequency range Above 1000MHz.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Please refer to the Attachment A.

8. Photographs - Constructional Details

Photo 1 Appearance of EUT

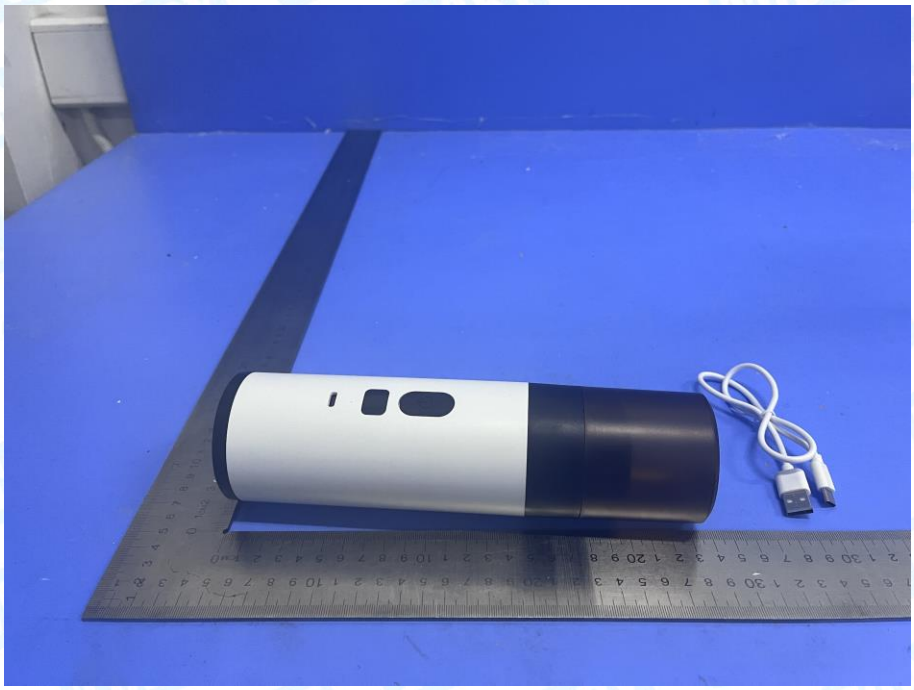


Photo 2 Appearance of EUT

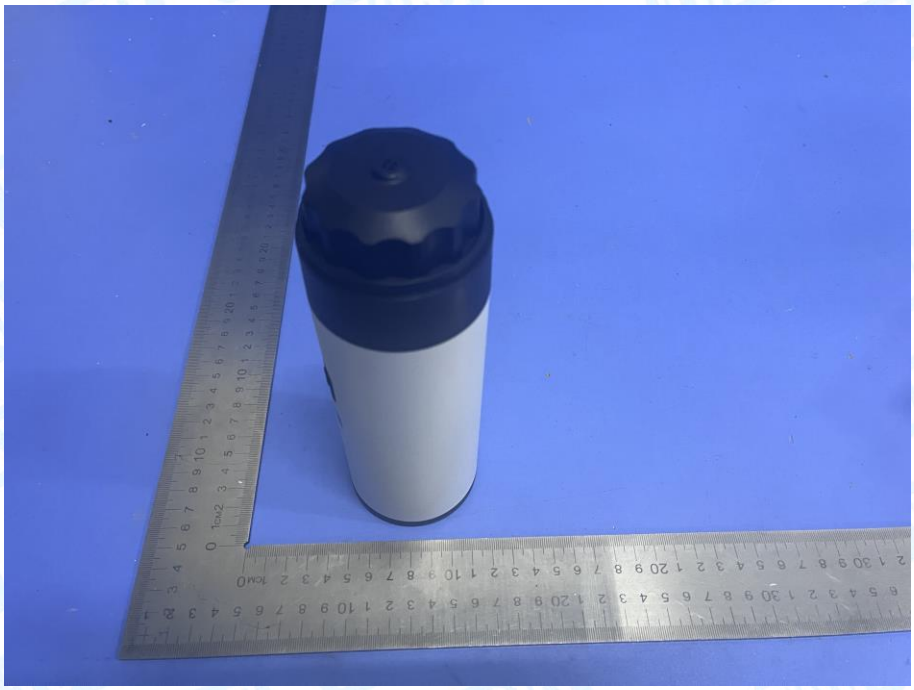


Photo 3 Appearance of EUT

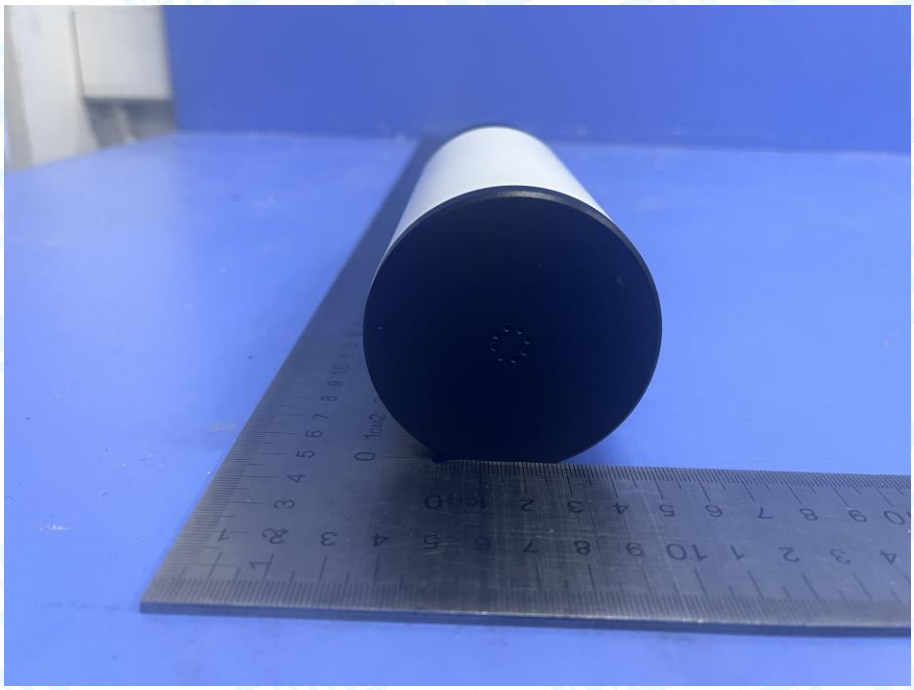


Photo 4 Appearance of EUT

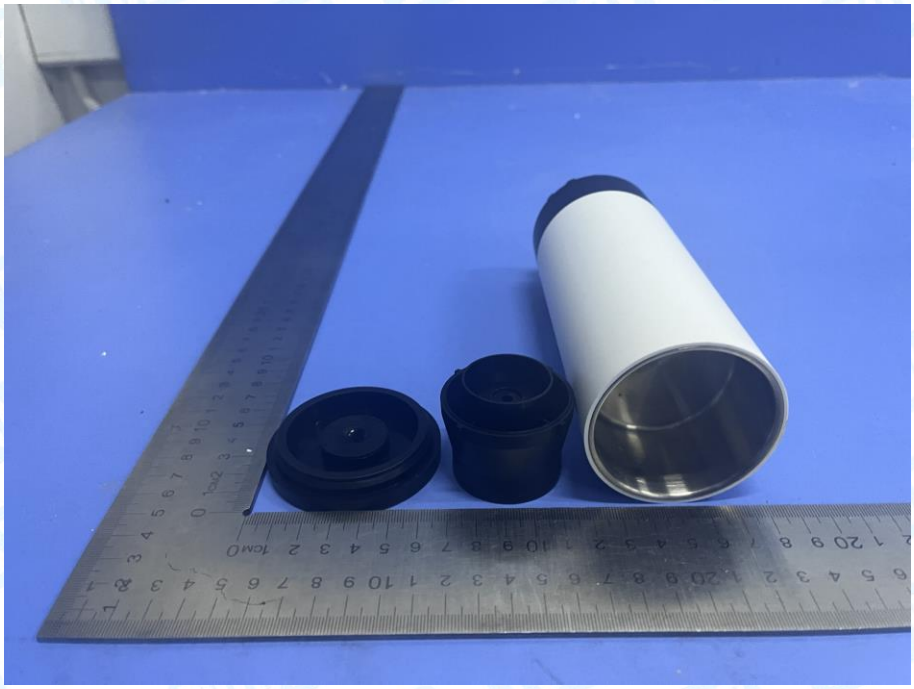


Photo 5 Internal of EUT

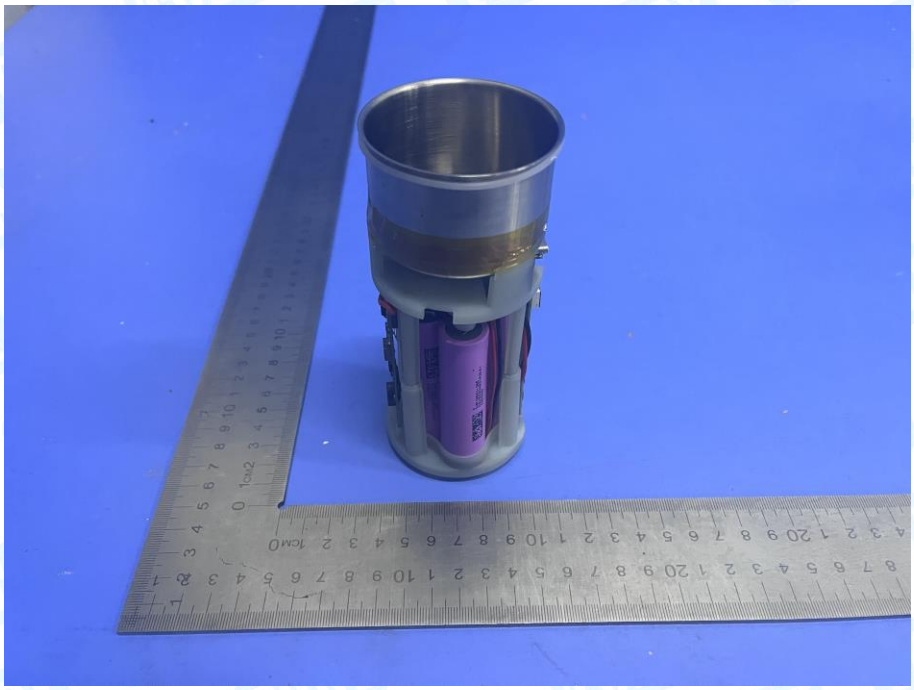


Photo 6 Internal of EUT

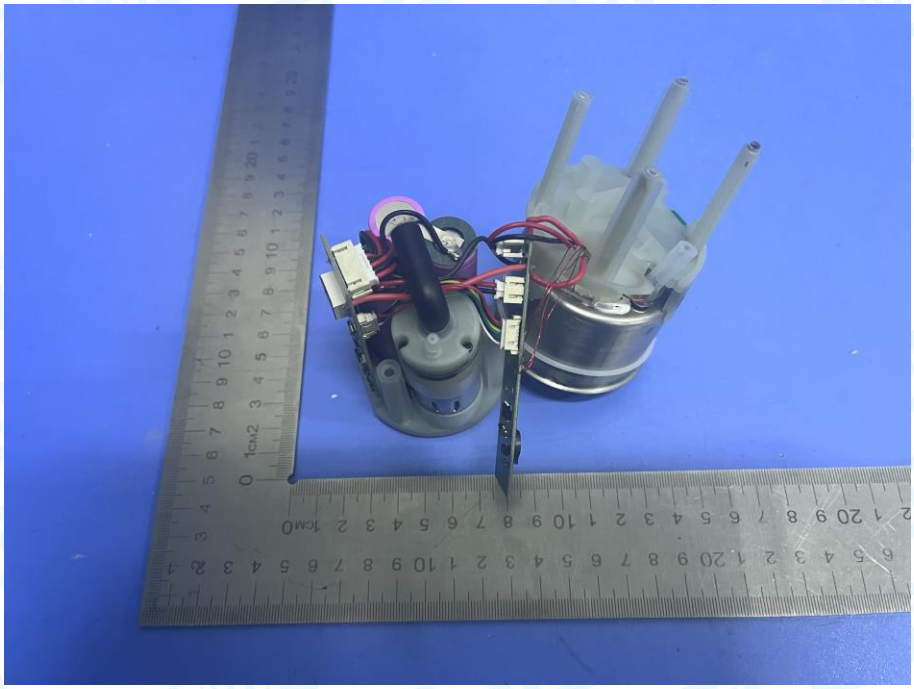


Photo 7 Appearance of PCB

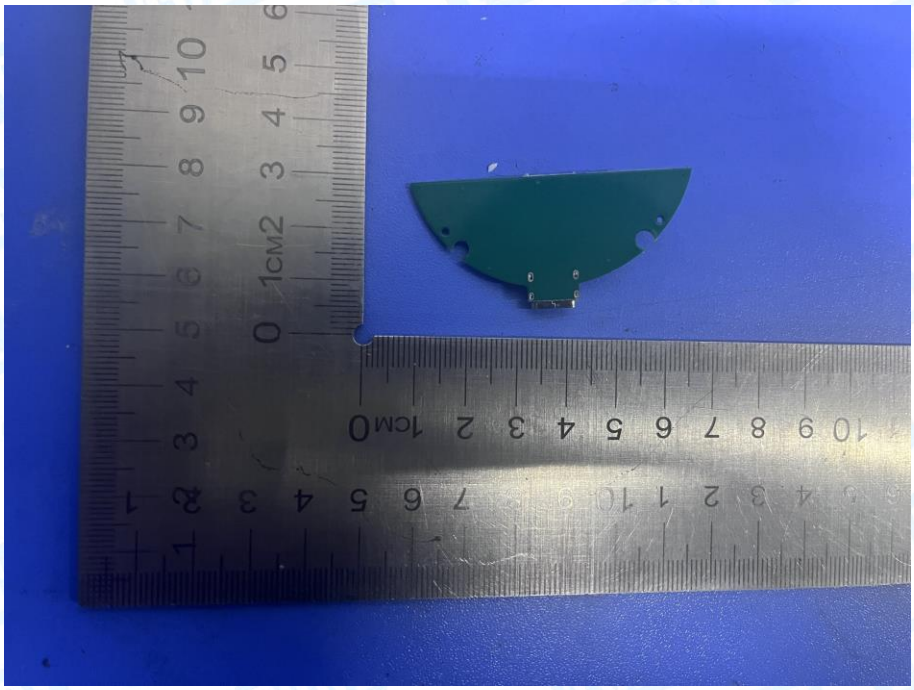


Photo 8 Appearance of PCB

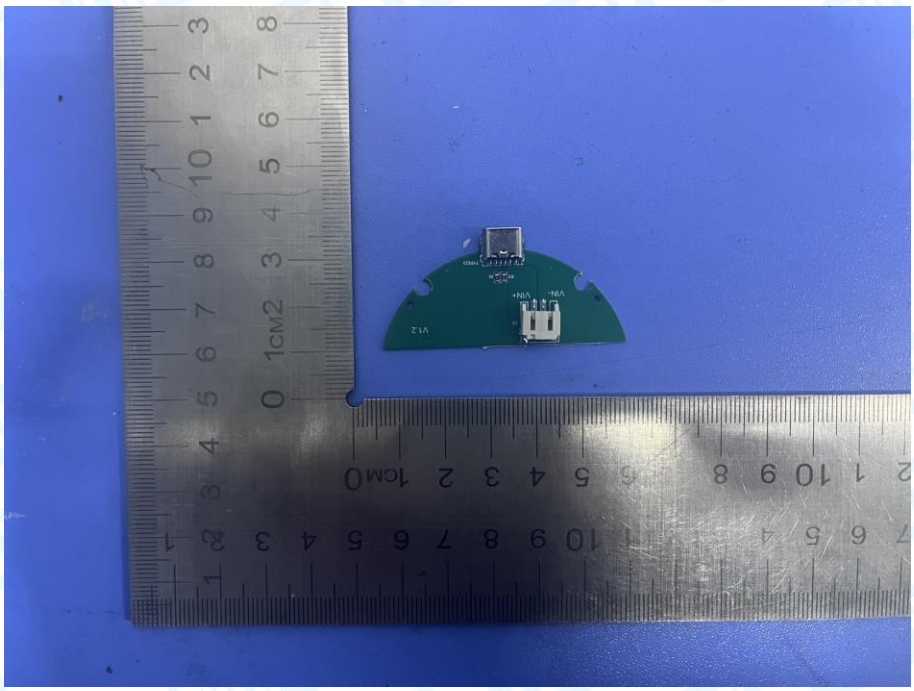


Photo 9 Appearance of PCB

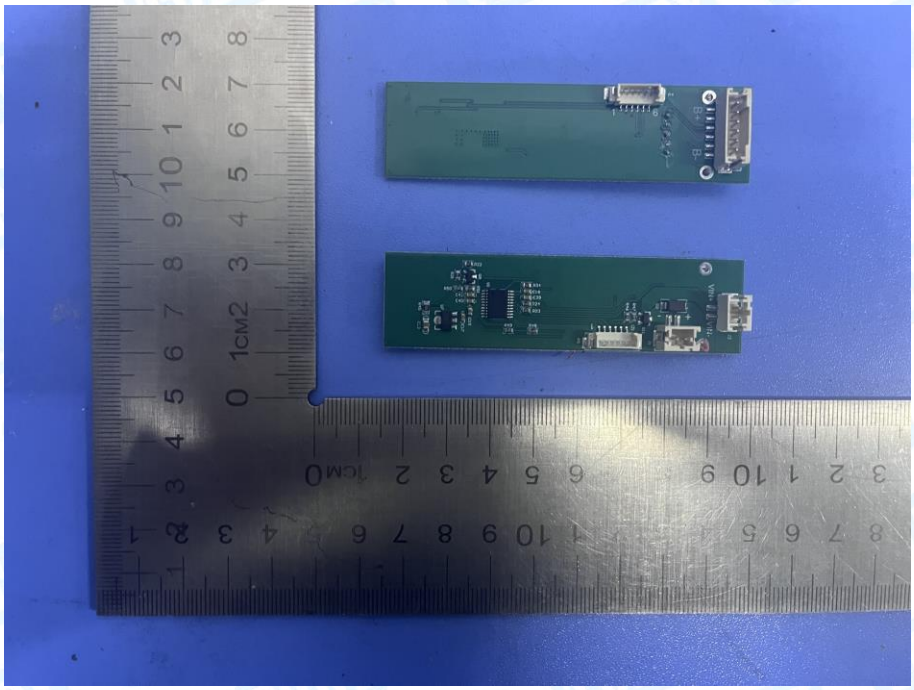


Photo 10 Appearance of PCB

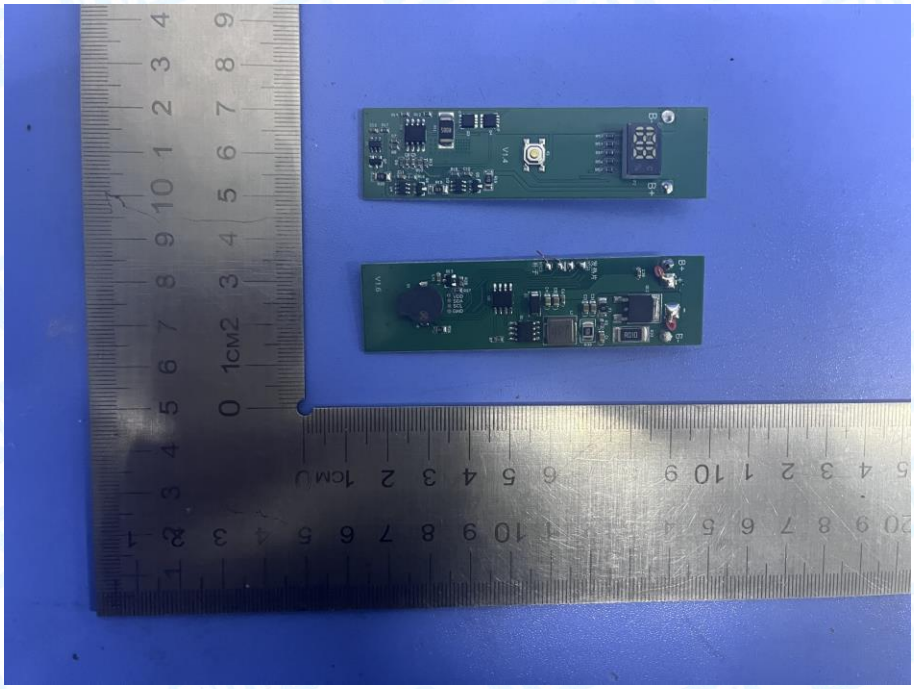


Photo 11 Appearance of Battery



9. Photographs - Test Setup

Radiated Emission Test Setup--Below 1G




Radiated Emission Test Setup--Below 1G



Attachment A--Radiated Emission Test Data

----Below 1G


Temperature:	23.5℃	**Relative Humidity:**	46%
Pressure:	1020 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	Mode 1		
Remark:	Only showed test data of the worst mode		

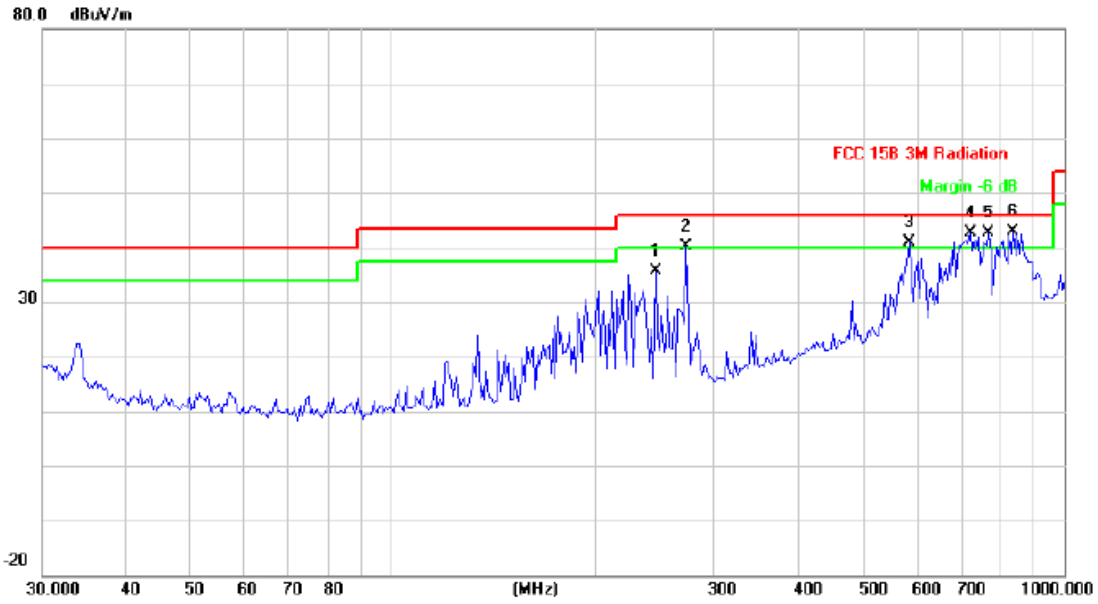

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		33.7986	34.26	-11.45	22.81	40.00	-17.19	peak
2		113.7143	49.69	-15.47	34.22	43.50	-9.28	peak
3		196.5098	48.72	-13.12	35.60	43.50	-7.90	peak
4	*	293.0842	50.47	-11.22	39.25	46.00	-6.75	peak
5		330.1949	43.32	-10.03	33.29	46.00	-12.71	peak
6		709.1823	36.03	0.56	36.59	46.00	-9.41	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)


Temperature:	23.5℃	**Relative Humidity:**	46%
Pressure:	1020 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	Mode 1		
Remark:	Only showed test data of the worst mode		

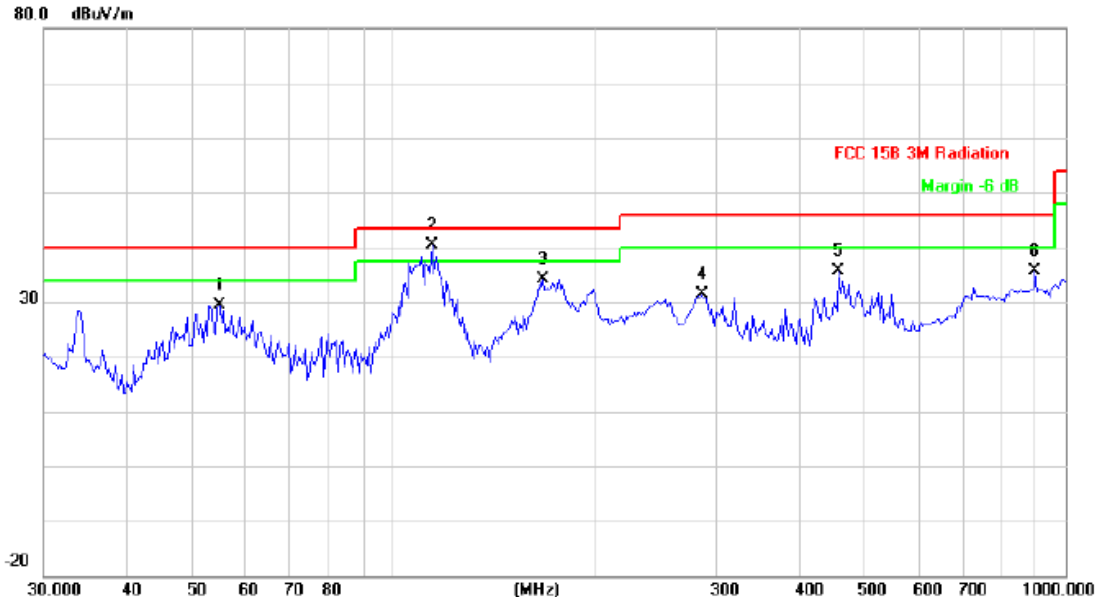

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		54.8348	45.65	-16.22	29.43	40.00	-10.57	peak
2	*	113.7143	55.93	-15.47	40.46	43.50	-3.04	peak
3		166.0680	48.10	-13.86	34.24	43.50	-9.26	peak
4		286.9823	42.61	-11.28	31.33	46.00	-14.67	peak
5		459.1144	41.34	-5.63	35.71	46.00	-10.29	peak
6		900.1474	31.46	4.06	35.52	46.00	-10.48	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)


Temperature:	23.5℃	Relative Humidity:	46%
Pressure:	1020 hPa		
Test Voltage:	DC 11.1V		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2		
Remark:	Only showed test data of the worst mode		

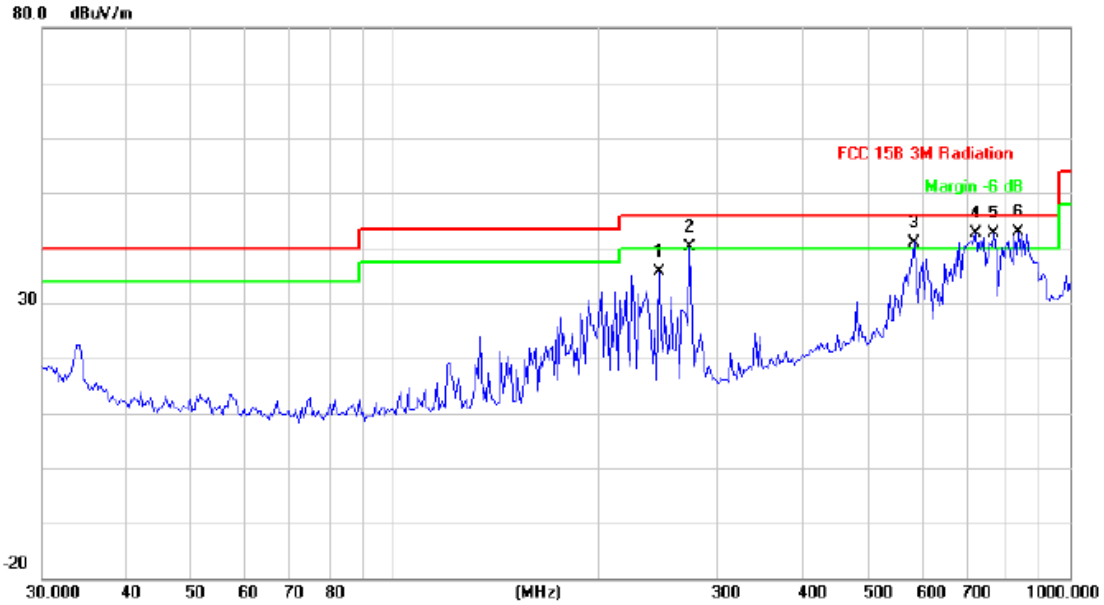

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		245.9507	48.07	-12.56	35.51	46.00	-10.49	peak
2	!	273.2341	51.91	-11.88	40.03	46.00	-5.97	peak
3	!	586.8437	43.63	-2.63	41.00	46.00	-5.00	peak
4	!	724.2611	42.01	0.73	42.74	46.00	-3.26	peak
5	!	771.4486	41.52	1.07	42.59	46.00	-3.41	peak
6	*	839.1816	40.18	2.67	42.85	46.00	-3.15	peak

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.5℃	Relative Humidity:	46%
Pressure:	1020 hPa		
Test Voltage:	DC 11.1V		
Ant. Pol.	Vertical		
Test Mode:	Mode 2		
Remark:	Only showed test data of the worst mode		

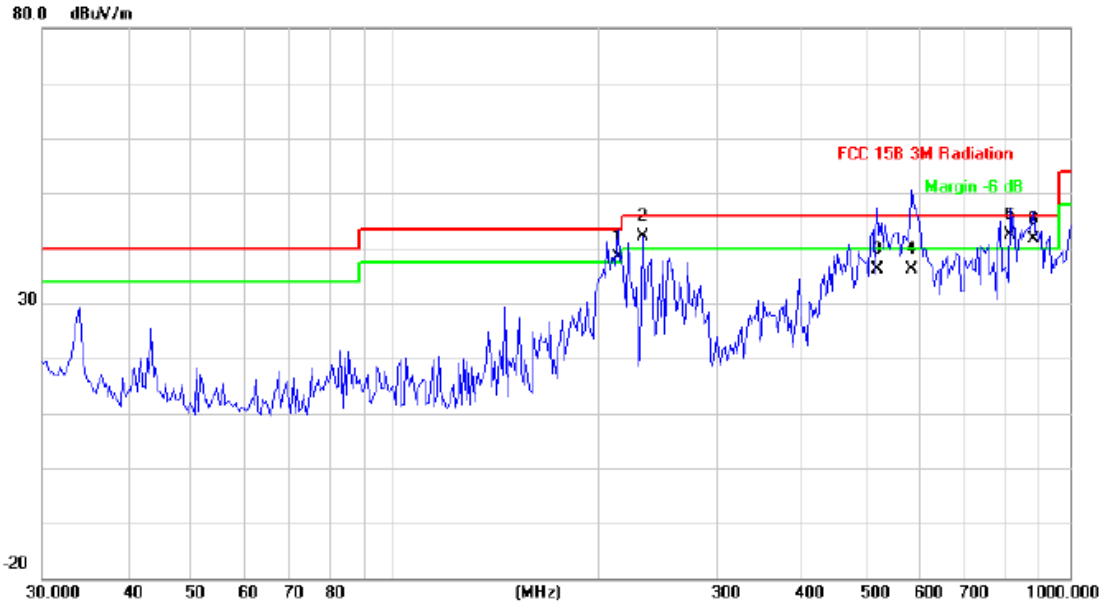

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	!	213.7633	51.07	-12.72	38.35	43.50	-5.15	QP
2	!	232.5318	54.89	-12.68	42.21	46.00	-3.79	peak
3		517.2480	40.15	-3.90	36.25	46.00	-9.75	QP
4		582.7424	38.99	-2.74	36.25	46.00	-9.75	QP
5	*	815.9678	40.07	2.29	42.36	46.00	-3.64	QP
6	!	881.4067	37.88	3.70	41.58	46.00	-4.42	QP

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

-----END OF REPORT-----